Name of Work:Construction of Watch Tower in NES Circle of Yelahanka sub division

Modified Schedule B

Sl No	Description of Work	Unit	Qty	Rate in Rs.	Rate in words
1	Dismantling of existing structures like culverts, bridges, retaining walls and other structure comprising of masonry, cement concrete, wood work, steel work, including T&P and scaffolding wherever necessary, sorting the dismantled material, disposal of unserviceable material and stacking	Cum	24.48	309.80	Rupees Three Hundred Nine And Paise Eighty Only
	Above 125%	Cum	3.61	315.24	Rupees Three Hundred Fifteen And Paise Twenty Four Only
2	Dismantling the tile work in floor and roof laid in cement or surki mortar including stacking the materials with in 50 m lead of tiles thickness 10mm to 25mm. including cost of materials, labour, HOM complete as per specifications	Sqm	80.50	52.69	Rupees Fifty Two And Paise Sixty Nine Only
3	Easing of shutters of door. including cost of materials, labour, HOM complete as per specifications.	Nos	6.00	93.58	Rupees Ninety Three And Paise Fifty Eight Only
4	Scraping plaster in lime or cement mortar from brick / stone masonry.	Sqm	118.43	22.71	Rupees Twenty Two And Paise Seventy One Only
5	Dismantling of existing structures like culverts, bridges, retaining walls and other structure comprising of masonry, cement concrete, wood work, steel work, including T&P and scaffolding wherever necessary, sorting the dismantled material, disposal of unserviceable material and stacking the serviceable material with all lifts complete as per specifications. By mechanical means. A cement concrete grade M-15m & M-20.	Cum	31.19	369.76	Rupees Three Hundred Sixty Nine And Paise Seventy Six Only
6	Dismantling CI or AC rain water Pipes with fittings and clamps and stacking the materials with a lead of 50 meters. including cost of materials, labour, HOM complete as per specifications.	m	50.00	27.26	Rupees Twenty Seven And Paise Twenty Six Only
7	Dismantling weather proof course and removing and conveying the debris to a distance upto 200m. including cost of materials, labour, HOM complete as per specifications.	Cum	8.05	792.21	Rupees Seven Hundred Ninety Two And Paise Twenty One Only
8	Loading and Unloading of Stone Boulder / Stone aggregates /Sand/ Kanker / Moorum. KSRRB M100-1 : Placing tipper at loading point, loading with front end loader,dumping, turning for return trip, excluding time for haulage and return trip complete as per specifications.	Cum	75.46	103.57	Rupees One Hundred Three And Paise Fifty Seven Only
	Above 125%	Cum	220.95	104.72	Rupees One Hundred Four And Paise Seventy Two Only
9	Earthwork in surface excavation in ordinary soil for levelling and lowering the ground manually (other than foundation of buildings, culverts, road drains and trenches of pipe lines and cables) and removing the excavated stuff to a distance not exceeding 50m and lift upto 1.5m, excavated surface levelled and neatly dressed, disposed earth to be levelled after breaking of clods and neatly dressed as per specifications with all lead and lift and directions of the Engineer-In-charge of the work.	Cum	0.00	267.10	Rupees Two Hundred Sixty Seven And Paise Ten Only

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಯೋಜನಾ ವಿಭಾಗ, ಬೆಸ್ಕಾಂ ವೃತ್ತ
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಸಂಕೀರ್ಣ, ಶಿವಾನಂದಪುರ,
ಬೆಂಗಳೂರು - 560032.

Sl No	Description of Work	Unit	Qty	Rate in Rs.	Rate in words
10	Earthwork excavation by manual means for foundation of buildings, water supply and sanitary lines and electrical conduits etc, either in pits or in trenches 1.5m and above in width, in Ordinary soil not exceeding 1.5 m. in depth including dressing the bottom and sides of pits and trenches, stacking the excavated soil clear from edges of excavation with lead upto 50 m. including breaking of clods	Cum	157.86	319.79	Rupees Three Hundred Nineteen And Paise Seventy Nine Only
11	Providing and filling in foundation with granite / trap borken metal 100mm and down size, with approved sand including hand packing, ramming, watering, including cost of all materials and labour with all lead and lift complete as per specification. (Soling) with all lead and lift and directions of the Engineer-In-charge of the work.	Cum	4.49	2598.31	Rupees Two Thousand Five Hundred Ninety Eight And Paise Thirty One Only
12	Providing and laying in position plain cement concrete of mix 1:3:6 with OPC cement @ 220kgs, with 40mm and down size graded granite metal coarse aggregate @ 0.892cum and fine aggregates @ 0.465cum machine mixed, machine mixed, concrete laid in layers not exceeding 15 cms, thick well compacted in foundation including cost of all materials, labour HOM of machinery, curing complete as per specifications with all lead and lift and directions of the Engineer-In-charge of the work.	Cum	24.66	5555.48	Rupees Five Thousand Five Hundred Fifty Five And Paise Forty Eight Only
	Above 125%	Cum	18.28	6274.28	Rupees Six Thousand Two Hundred Seventy Four And Paise Twenty Eight Only
13	Providing and laying in position plain cement concrete of mix M15 with cement @ 240kgs, with 20mm and down size graded granite metal coarse aggregates @0.878cum and fine aggregtes @ 0.459cum, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation,plinth and sills, including cost of all materials, labour, HOM of machinery, curing complete as per	Cum	10.89	5798.96	Rupees Five Thousand Seven Hundred Ninety Eight And Paise Ninety Six Only
14	Providing and constructing granite / trap / basalt size stone masonry in basement with cement mortar 1:6, edges of stones chistle dressed in courses not less than 15 cms high, bond stones at two m. apart in each course including cost of materials, labour, curing complete as per specifications with all lead and lift and directions of the Engineer-In-charge of the work.	Cum	18.13	6813.75	Rupees Six Thousand Eight Hundred Thirteen And Paise Seventy Five Only
15	Filling available excavated earth (excluding rock) insides of foundations upto plinth in layers not exceeding 20cms. In depth, compacting each deposited layer by ramming after watering with a lead upto 50m. And lift upto 1.5m including cost of all labour (Inside platrform , sides and sides of the area) with all lead and lift and directions of the Engineer-In-charge of the work.	Cum	173.81	215.31	Rupees Two Hundred Fifteen And Paise Thirty One Only
16	Conveying the excavated debries and over burden earth etc to a lead 20 kms distances by using private vehicles this including the cost of loading and inloading charges etc with all lead and lift and directions of the Engineer-In-charge of	Cum	0.00	130.82	Rupees One Hundred Thirty And Paise Eighty Two Only
17	Providing and laying in position reinforced cement concrete of design Mix M25 with OPC @ 340kgs, with 20mm and down size graded granite metal coarse aggregates @0.70cum and fine aggregtes @ 0.47cum, with superplastisiser @3lts confirming to IS9103-1999 Reaffirmed-2008, machine mixed, concrete laid in layers	Cum	14.68	6465.79	Rupees Six Thousand Four Hundred Sixty Five And Paise Seventy Nine Only

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಯೋಜನಾ ವಿಭಾಗ, ಮಂಡಲದ ವಲಯ
ಬಿ.ಬಿ.ಎಂ.ಪಿ

Sl No	Description of Work	Unit	Qty	Rate in Rs.	Rate in words
	Above 125%	Cum	28.15	7081.47	Rupees Seven Thousand Eighty One And Paise Forty Seven Only
18	Providing and laying in position reinforced cement concrete of design mix M25 with OPC cement @ 340kgs, with 20mm and down size graded granite metal coarse aggregates @0.70cum and fine aggregtes @ 0.47cum, with superplastisiser @3lts confirming to IS9103-1999 Reaffirmed-2008, machine mixed, concrete laid in layers not exceeding 15 cms thick, vibrated for all works in foundation for footings, pedastals, retaining walls, return	Sqm	0.00	6215.96	Rupees Six Thousand Two Hundred Fifteen And Paise Ninety Six Only
19	Providing and laying flooring using prepolished, gang saw/water cut 19mm thick granite laid with a bed of 20mm thick 1:4 cm & jointed with neat cement slurry mixed with pigment to mach shade of granite slabs including laying POP on finished surface and cleaning the surface, including the cost of all materials, mortar and labours etc., complete as per specifications.using silver grey granite / Multy Red / Ruby Red / Black / Hassan Green / River Pink Granite of	Sqm	0.00	2434.78	Rupees Two Thousand Four Hundred Thirty Four And Paise Seventy Eight Only
20	Providing & removing centeing shuttering, strutting, propping etc., and removal of form work for foundations, footings bases of columns for mass concrete including cost of all materials, labour complete as per specifications with all lead and lift and directions of the Engineer-In-charge of the work.	Sqm	12.78	276.18	Rupees Two Hundred Seventy Six And Paise Eighteen Only
21	Providing and removing centering, shuttering, strutting, propping etc., and removal of form work for vertical surface such as walls at any thicknes including cost of all materials, labour complete as per specifications and direction of the Engineer in charge with all lead and lift and directions of the Engineer-In-charge of the work.	Sqm	51.00	383.39	Rupees Three Hundred Eighty Three And Paise Thirty Nine Only
	Above 125%	Sqm	175.62	390.51	Rupees Three Hundred Ninety And Paise Fifty One Only
22	Providing TMT Steel Reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications. - TMT Bars Fe 500 with all lead and lift and	MT	3.21	69475.72	Rupees Sixty Nine Thousand Four Hundred Seventy Five And Paise Seventy Two Only
	Above 125%	Mt	2.48	91387.22	Rupees Ninety One Thousand Three Hundred Eighty Seven And Paise
23	Providing and constructing load bearing wall with concrete solid blocks having block ebsity not less than 1800 kg/m3 Having aq minimum average compressive strength of 5.00 N.mm2 confirming to IA 2185 (Part q) 2005 and constructed with CM 1:4 as [er IS 2572:2005 including cost of all materials labour charges, scaffolding. curing hire charges of machineries etc as per specifications Solid concrete blocks of Size 400x150x200 mm with all lead and lift and directions of the Engineer-In-charge of the work.	Sqm	0.00	1019.34	Rupees One Thousand Nineteen And Paise Thirty Four Only

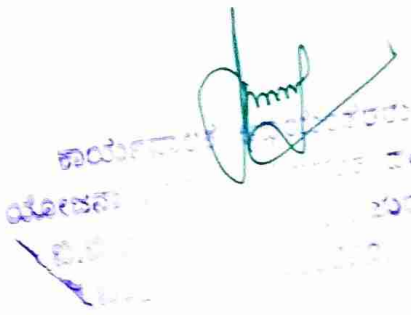

Sl No	Description of Work	Unit	Qty	Rate in Rs.	Rate in words
24	Providing 20mm thick cement plaster in single coat with cement mortar, to stone masonry & concrete surface including rounding off corners wherever required smooth rendering, including providing and removing scaffolding, cost of materials, labour, curing etc., complete as per specification.Outside Plastering with all lead and lift and directions of the Engineer-In-charge of the work.	Sqm	28.92	309.80	Rupees Three Hundred Nine And Paise Eighty Only
25	Providing Rough cement plastering 15mm thick in single coat with cement mortar 1:4, to brick masonry for base of dadooing works with sand of approved quality, providing and removing scaffolding, including cost of materials, labour, curing complete as per specifications with all lead and lift and directions of the Engineer-In-charge of the work.	Sqm	0.00	219.86	Rupees Two Hundred Nineteen And Paise Eighty Six Only
26	Providing and fixing M.S. Grill over existing compound wall as per using 16mm x 16mm M.S. Square rod at 150mm c/c spacing and 6mm x 40mm M.S. flats at horizontal and 6mm x12mm M.S. flat for ornamental design and providing shop edge design at the vertex of every vertical rods, including welding, grinding wherever necessary. All the steel surface should be thoroughly cleaned free of rust and painted with anti corrosive paint (shop paint) etc., complete. The work includes cost of all materials, labour charges for all items of	Sqm		5742.63	Rupees Five Thousand Seven Hundred Forty Two And Paise Sixty Three Only
27	Providing and fixing Stainless steel 304 grade for staircase raling balconies ramps with hand rail 50mm dia 16 guage hollow pipe welded to vertical hollow 50mm dia pipe of 16 guage, stainless steel vertical pipe spaced at 1.20m regular intervals, and 5 Nos of M25mm dia. Stainless steel hollow horizontal pipe are welded to vertical 50mm dia hollow pipe. The entire assembly is fixed to staircase concrete by using expansion bolts by drilling concrete etc., complete including cost of materials, labour, HOM of machineries	Sqm		6439.45	Rupees Six Thousand Four Hundred Thirty Nine And Paise Forty Five Only
28	Providing textured paint of approved quality, colour and shade to wall surface after cleaning and rubbing the wall surface with wire brush of medium size emery stone to remove all the loosely adhering particles, the surface is then cleaned with water and ensured that it is in line and level. The textured material is then mixed with 40-50% of clean water until a homogeneous thick slurry is formed, the slurry is left for 5-10 min, to react completely with ingredients. The textured finish prepared as above is then applied to the wall surface with suitable roller/spray gun/putty/ blade/ trowel to get the desired finish. The finished surface shall be applied with two coats of exterior	Sqm	0.00	469.69	Rupees Four Hundred Sixty Nine And Paise Sixty Nine Only
29	Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specifications including spreading in uniform thickness, hand packing, rolling with 3- wheeled steel/vibratory roller 8-10 tonnes in stages to proper grade and camber, applying and brooming requisite type of screening/binding materials to fill up the interstices of coarse aggregates, watering and compacting to the required density complete as per Specification Crushable type such as Moorum or Gravel for	Cum	0.00	2192.21	Rupees Two Thousand One Hundred Ninety Two And Paise Twenty One Only

Sl No	Description of Work	Unit	Qty	Rate in Rs.	Rate in words
30	Providing and laying heavy duty cobble stones 60mm thick interlock pavers, using cement and course sand for manufacture of blocks of approved size, shape and colour with a minimum compressive strength of 281 kg per sqm over 50mm thick sand bed (average thickness) and compacting with plate vibrator having 3 tons compaction force thereby forcing part of sand underneath to come up in between joints, final compaction of paver surface joints into its final level, including cost of materials, labour and HOM of machineries complete as per specifications.heavy duty cobble stones 60mm thick with all lead and lift and directions of the Engineer-In-charge of the work.	Sqm	0.00	1126.54	Rupees One Thousand One Hundred Twenty Six And Paise Fifty Four Only
31	Providing and fixing Pre cast solid concrete kerb stones made out of CC 1:2:4 and finished with CM 1:3 plastering and finishing cutting etc., complete.-do- of size 450 x 150 x 500 mm with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	220.00	472.42	Rupees Four Hundred Seventy Two And Paise Forty Two Only
32	Providing and applying spray painting in two coats (excluding priming coat) over concrete / masonry / asbestos cement sheet / plastered surfaces with flat wall paint of approved brand to give even shade after cleaning the surface of all dirt, dust and other foreign matter, and sand papering including cost of materials, labour, complete as per specifications with all lead and lift and directions of the Engineer-In-charge of the work.	Sqm	0.00	91.76	Rupees Ninety One And Paise Seventy Six Only
33	Providing Skirting, Dado, rises of steps with BLUE TILES 6mm thick on 10mm thick cement plaster 1:3 and jointed with white cement slurry over roughj plaster surface (excluding cost of rough plastered surface which should be measured and paid separetely) using glazed tiles of approved make and size including cost of materials, labour, complete as per specifications. Fixed with Cement Tile, fixing compound and adhesive/Chemical with all lead and	Sqm	0.00	1485.40	Rupees One Thousand Four Hundred Eighty Five And Paise Forty Only
34	Providing and laying integral cement based waterproofing treatment including preparation of surface as required for treatment of roofs, balconies, terraces etc., consisting of following application. (a) Applying and grouting a slurry coat of neat cement using 2.75 kg/sqm of cement admixed with proprietary water proofing compound conforming to IS:2645 over the RCC slab after cleaning the surface before treatment. (b) Laying cement concrete using broken brick bats 25mm to 100mm size with 50% of cement mortar 1:5 admixed with proprietary water proofing compound conforming IS:2645 over 20mm thick layer of cement mortar 1:5 admixed with proprietary water proofing compound to required slope and treating similarly the	Sqm	0.00	1063.85	Rupees One Thousand Sixty Three And Paise Eighty Five Only
35	Laying of barbada gross over newly laid red earth surface BBMP approved rate (harticulture) with all lead and lift and directions of the Engineer-In-charge of the work.	Sqm	0.00	347.05	Rupees Three Hundred Forty Seven And Paise Five Only
36	Irrigation Sprinkler with all lead and lift and directions of the Engineer-In-charge of the work.	Sqm	0.00	1980.53	Rupees One Thousand Nine Hundred Eighty And Paise Fifty Three Only
37	SAND FILTER with multiport controlllable DMX and VFD based valve Supply of bobbinwound fibreglass and polyester resin anti corrosive sand filter with 1.5" connections, with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	272550.00	Rupees Two Lakh(s) Seventy Two Thousand Five Hundred Fifty Only

Sl No	Description of Work	Unit	Qty	Rate in Rs.	Rate in words
38	FILTER MEDIA Supply of Sand Media Size: 0.5 -1mm & Milled down to remove sharp points with all lead and lift and directions of the Engineer-In-charge of the work.	Kgs	0.00	79.95	Rupees Seventy Nine And Paise Ninety Five Only
39	Recirculation Pump: Supply of centrifugal self priming pump with high hydraulic efficiency, chemical resistant and ultra quiet operation. Each pump integrated along with IP-55 protection- class F continuous rating. with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	158442.40	Rupees One Lakh(s) Fifty Eight Thousand Four Hundred Forty Two And Paise Forty Only
40	MAIN BASIN FITTINGS: Main Drain , Return inlet Vaccuum point, wall codnuits with all lead and lift and directions of the Engineer-In-charge of the work.	Lot	0.00	31382.32	Rupees Thirty One Thousand Three Hundred Eighty Two And Paise Thirty
41	Nozzles FOR FOUNTAIN: Fountain nozzles Supply of FOAM jets with 2" connection with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	19805.30	Rupees Nineteen Thousand Eight Hundred Five And Paise Thirty Only
42	Control system for nozzles with complete 2 way integration to system with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	174188.52	Rupees One Lakh(s) Seventy Four Thousand One Hundred Eighty Eight And
43	Adj Flange Supply of S S adj flange with 2" inlet & outlet connection capable of leveling the founatin nozzle to plumb with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	25826.84	Rupees Twenty Five Thousand Eight Hundred Twenty Six And Paise Eighty Four Only
44	PUMP FOR FOUNTAIN: Supply submersible pump 240 LPM @ 6 Mtr head with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	65258.46	Rupees Sixty Five Thousand Two Hundred Fifty Eight And Paise Forty Six Only
45	LIGHT FOR HGH SPRAY JET: Underwater Light Supply of Stainless Steel 316 Stand/ Niche mounted LED light 12W-12V, Warm White with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	22757.02	Rupees Twenty Two Thousand Seven Hundred Fifty Seven And Paise Two Only
46	Driver Supply of SMPS driver. 50W/ 12V with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	9407.52	Rupees Nine Thousand Four Hundred Seven And Paise Fifty Two Only
47	UV System Supply of 25W UV, Suitable for 10-20KLtrs, 1.5" connections with hose tails with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	68328.29	Rupees Sixty Eight Thousand Three Hundred Twenty Eight And Paise Twenty Eight Only
48	CONTROL AND REGULATORY VALVES: All valves shall be in PVC with PN10 rating and EPDM seat. Valves and fittings with complete IP rated, Ball Valve single union dia 7.1, 32 mm , Ball Valve single union dia 63mm , Single union check valve 63mm with all lead and lift and directions of the Engineer-In-charge of the work.	Lot	0.00	64760.61	Rupees Sixty Four Thousand Seven Hundred Sixty And Paise Sixty One Only
49	PIPES AND FITTINGS MAKE:SUPREME/ FINOLEX 90mm dia pipe = 6 mtr 75mm dia pipe = 6 mtr 63mm dia pipe = 84 mtr 50mm dia pipe = 36 mtr 32mm dia pipe = 6 mtr with all lead and lift and directions of the Engineer-In-charge of the work.	Set	0.00	67338.02	Rupees Sixty Seven Thousand Three Hundred Thirty Eight And Paise Two Only
50	LIGHT: Supply of copper cable with PVC conduits from junction boxes to transformer & transformer to control panel. (length in mters as per drawing) 1.5 Sq mm = 100 mtr 2.5 Sqmm = 50 mtr 4 Sqmm = 10 mtr with all lead and lift and directions of the Engineer-In-charge of the work.	Set	0.00	29707.95	Rupees Twenty Nine Thousand Seven Hundred Seven And Paise Ninety Five Only

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಯೋಜನಾ ವಿಭಾಗ,
ಬಿ.ಬಿ.ಎಂ.ಪಿ.
ಬೆಂಗಳೂರು - 560002

Sl No	Description of Work	Unit	Qty	Rate in Rs.	Rate in words
51	Supply of Control panel for controlling pumps, lights.Body shall be powder coated sheet metal cabinet for indoor installation, wall mounted, dust proof and shall be with hinged doors with rubber gasket. Panel shall read and display pump status, light status,voltage, current. Panel shall come with single phase prevention, phase reversal protection. (in case of 3-phase pumps). with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	590525.00	Rupees Five Lakh(s) Ninety Thousand Five Hundred Twenty Five Only
52	CLEANING & MAINTENANCE Vacuum Hose , wall brush, algae brush, flat net, deep net, telescopic pole, vaccuuum head, test kit with all lead and lift and directions of the Engineer-In-charge of the work.	Lot	0.00	136275.00	Rupees One Lakh(s) Thirty Six Thousand Two Hundred Seventy Five Only
53	INSTALLATION with all lead and lift and directions of the Engineer-In-charge of the work.	L/s	0.00	22712.50	Rupees Twenty Two Thousand Seven Hundred Twelve And Paise Fifty Only
54	Clock Tower Structural steel Specification: Providing, fabricating, erecting and fixing in position of steel plates as per design at all Elevations using fusion welding quality steel conforming to latest IS: 2062- Steel Plate Grade/Classification E250 (Fe410W) B or E350 (Fe 490) (as required and Indicated in drawings), including cutting, welding or bolting, supply of Bolts/nuts/washers etc. complete as per drawings including surface Preparation. The plates are joined together on one side of the web by a continuous automatic submerged arc welding process to produce the section required and other side by stich weld and applying two coats of synthetic enamel paint over a coat of primer at all levels and location etc., complete all as specified	Kgs	0.00	181.70	Rupees One Hundred Eighty One And Paise Seventy Only
55	1. Clock dial design .... : Roman number dials with central Art work as per your selected clock dials. The numbers will be black vinyl cut letters placed on Food Grade Acrylic Imported Sheet of 5mm Thickness. We will produce the clock dial exactly as per your selected design.2. Machine for the tower clocks..... ..... : We will provide GPS based Machine for the tower clock so that the clocks will work with satellite time signals and will display IST Indian Standard Time. 3. Hands for the clock dials..... .. .. : We will provide One No. Hour hand and One No. Minute hand to show time on the clocks. Both the hands will be made with Aluminium Sheet metal and will be dynamically balanced for smooth travelling on the clock dials. The hands will be finished with black powder coat	Nos	0.00	863075.00	Rupees Eight Lakh(s) Sixty Three Thousand Seventy Five Only
56	INSTALLATION with all lead and lift and directions of the Engineer-In-charge of the work.	L/s	0.00	22712.50	Rupees Twenty Two Thousand Seven Hundred Twelve And Paise Fifty Only
57	HT Cable : Supply and laying of high tension 11 KV cable, Dry Curing & Dry Cooling with true triple extrusion, 3 core under ground XLPE (E) cable having stranded compact circular aluminium conductor, screened insulated, insulation screened with extruded semiconducting compound in combination with copper tape, core laid up innner sheathed of PVC tape GI flat strip armoured and overall PVC sheathed as per IS 7098/11/85 with latest ammendments 3C x 185Sq.mm with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	1362.75	Rupees One Thousand Three Hundred Sixty Two And Paise Seventy Five Only

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಯೋಜನಾ ವಿಭಾಗ,
ಬಿ.ಬಿ.ಎಂ.ಪಿ.
ಬೆಂಗಳೂರು-560052.

Sl No	Description of Work	Unit	Qty	Rate in Rs.	Rate in words
58	Supplying of 1.1 KV LT UG cable XLPE or Heat resistant pvc insulatied,pvc extruded inner sheath armoured UG LT cable as per IS-1554(Part-1), or IS-7098 part-1, Armoring strip thickness in average +5% and resistivity 14ohms/kms(max) as per IS-3975 with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	149.90	Rupees One Hundred Forty Nine And Paise Ninety Only
59	Labour charges for laying of 1.1 KVclass UG cable in existing trench GI pipe / stoneware pipe / on wall/ on pole as required. 6 Sqmm to 16 Sq.mm with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	13.63	Rupees Thirteen And Paise Sixty Three Only
60	Supplying tinned copper lugs and crimping and wiring to terminal point for wire of the following sizes with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	12.72	Rupees Twelve And Paise Seventy Two Only
61	Supplying and fiixing of heavy duty cable glands suitable for UG cable of 1.1 KVclass (metal only) 19/20mm dia with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	68.14	Rupees Sixty Eight And Paise Fourteen Only
62	Supply and fixing of class A (Medium Duty) GI Pipe of wall thickness not less than 3.25mm on pole/ wall/ drain crossing with necessary clamping arrangements for UG cable of 1.1 KV 65mm with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	563.27	Rupees Five Hundred Sixty Three And Paise Twenty Seven Only
63	Supply and fixing of class A (Medium Duty) GI Pipe of wall thickness not less than 3.25mm on pole/ wall/ drain crossing with necessary clamping arrangements for UG cable of 1.1 KV 80mm with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	681.38	Rupees Six Hundred Eighty One And Paise Thirty Eight Only
64	providing, laying and fixing following dia RCC pipe NP2 class (light dyuty) in ground complete with RCC collars,jointing with cement mortar 1:2 (1 cement : 2 fine sand) including trenching (75 cm deep) and refilling etc. as required 150mm dia with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	590.53	Rupees Five Hundred Ninety And Paise Fifty Two Only
65	providing, laying and fixing following dia RCC pipe NP2 class (light dyuty) in ground complete with RCC collars,jointing with cement mortar 1:2 (1 cement : 2 fine sand) including trenching (75 cm deep) and refilling etc. as required 300mm dia with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	863.08	Rupees Eight Hundred Sixty Three And Paise Eight Only
66	Supply of LED Street light with pressure die cast aluminum housing body for optimal thermal dissipation. lamp compartment comprising of anit glare diffuser with injection moulded poly carbonate material delivering superior light output.Rated life burning Hrs 50000 hr. @ Lumen Maintainace of 70% maximum light intenstiy should be between 60degree to 70degrees. CCT>5500K IP66 optical and eectrical compartment & impact resistance of complete luminaire>IK08.Power Factor >0.9 with mains Surgeprotection min 5KV along with over voltage/Over load short circuit/ miswiring protection .compatible for pole mounting with outer dia of 40mm to 50mm.Universal Voltage driver to operate wide voltage range from 100v to270V 50/60Hz application, Compliance	Nos	0.00	7086.30	Rupees Seven Thousand Eighty Six And Paise Thirty Only

Sl No	Description of Work	Unit	Qty	Rate in Rs.	Rate in words
67	Fixing Halogen/metal halide/SVL/IL/LED flood light fitting over esisting pole/ wall ceiling including clamps, bolts, nuts and wiring using suitable capacity wires. with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	172.62	Rupees One Hundred Seventy Two And Paise Sixty Two Only
68	Supplying, fixing, wiring, earth electrode for grounding of lifts, transformers, DG set etc using 40mm dia 2.9mm thick 2.5 mtr long GI pipe with GI funnel with mesh and suitable size reducer fixed on the top of the earth electrode. The funnel should be enclosed in a CC chamber of 400x400x400mm with a cast iron cover. The earth electrode shall have staggered holes of 12mm dia and the electrode should be covered 150mm all-round with alternate layers of salt and charcoal from the bottom of the CC chamber. The connection from the electrode is to be	Nos	0.00	4088.25	Rupees Four Thousand Eighty Eight And Paise Twenty Five Only
69	Chemical earthing for grounding, cutouts, IC cutouts and other equipments on the meter board by using copper bonded/ SS rod with earth enhancing backfill compound which is non corrosive, thermally conductive, potential to permissible limits, superior fault condition capacity, non toxic weather resistance and capable of achieving ohmic value less than one ohm Using 10 ft copper bonded rod with backfill compund with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	7177.15	Rupees Seven Thousand One Hundred Seventy Seven And Paise Fifteen Only
70	Supplying and running of GI/copper strips for grounding connectionss, using necessary fixing material as required GI Strip 25x3mm with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	77.22	Rupees Seventy Seven And Paise Twenty Two Only
71	Supplying and running of GI/copper strips for grounding connectionss, using necessary fixing material as required GI Strip 25x3mm with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	113.56	Rupees One Hundred Thirteen And Paise Fifty Six Only
72	Supplying and running of GI/copper strips for grounding connectionss, using necessary fixing material as required CU Strip 25x3mm with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	545.10	Rupees Five Hundred Forty Five And Paise Ten Only
73	Supplying and running of GI/copper strips for grounding connectionss, using necessary fixing material as required CU Strip 40x6mm with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	1135.63	Rupees One Thousand One Hundred Thirty Five And Paise Sixty Two Only
74	Supplying and running G/Copper Conductor for grounding and (along with other wires in conduit system of wiring)using necessarysuitable size clamps,nails, guttas/Spacers etc... 8 SWG GI Wire with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	18.17	Rupees Eighteen And Paise Seventeen Only
75	25x6mm solid tape(flat) Conductor complete as specified in drawing & Meets the requirements. with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	113.56	Rupees One Hundred Thirteen And Paise Fifty Six Only
76	25x6mm GI solid tape(flat) Conductor complete as specified in drawing & Meets the requirements. with all lead and lift and directions of the Engineer-In-charge of the work.	m	0.00	114.60	Rupees One Hundred Fourteen And Paise Sixty Only

Sl No	Description of Work	Unit	Qty	Rate in Rs.	Rate in words
77	Supplying and fixing of Hot dip Galvanized M.S Bracket suitable for outdoor luminaires and mounted on octagonal pole using necessary bolts, nutes etc. complete. Single arm bracket with 1500mm standard 40/50dia with all lead and lift and directions of the Engineer-In-charge of the work.	Nos	0.00	2100.00	Rupees Two Thousand One Hundred Only
E-1	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material to the appropriate disposal area as per direction of Engineer-in-charge In cement mortar	Cum	30.16	876.58	Rupees Eight Hundred Seventy Six And Paise Fifty Eight Only
E-2	Providing Size Stone masonry with hard stone in foundation & plinth with Cement mortar 1:6 (1 cement : 6 coarse sand)	Cum	43.09	5946.07	Rupees Five Thousand Nine Hundred Forty Six And Paise Seven Only
E-3	Providing and laying flooring and steps fine dressed granite stone slabs 40 mm thick on cement mortar bed 1:6, 25 mm thick, and pointed with cement mortar 1:3 over existing cement concrete bed , including cost of materials, mortar, labour, curing complete as per specifications	Sqm	49.25	2647.51	Rupees Two Thousand Six Hundred Forty Seven And Paise Fifty One Only
E-4	Construction of Embankment by excavating the available approved Gravel/Murrum deposited at a place or borrow pits during or prior excavation with all lifts and lead, transportation to site, spreading, grading to required slope and compacting to meet the requirement complete as per specifications, including cost of labour,rolling,water,all materials,usage& all other appurtenaces required to complete the work..	Cum	61.15	446.62	Rupees Four Hundred Forty Six And Paise Sixty Two Only
E-5	Providing and constructing load bearing wall with Solid Concrete blocks of size 400x200x200mm having block density more than 1800kg/m3 and minimum compressive strength of 4.00 N/mm2 conforming to IS 2185 (Part - I) - 2005 and constructed with CM 1:4 as per IS 2572:2005 including cost of all materials, labour, scaffolding and curing, usage charges of machinery etc complete as per specifications.	Sqm	59.22	1178.77	Rupees One Thousand One Hundred Seventy Eight And Paise Seventy Seven Only
E-6	Providing and laying flooring and steps fine machine polished granite stone slabs 20 mm thick on cement mortar bed 1:6, 20 mm thick, and joints finished with cement mortar 1:3 over existing cement concrete bed , including cost of materials, mortar, labour, curing complete as per specifications	Sqm	108.90	2667.51	Rupees Two Thousand Six Hundred Sixty Seven And Paise Fifty One Only
E-7	Providing and fixing 1mm thick M.S. sheet door with frame of 40x40x6 mm angle iron and 3 mm M.S. gusset plates at the junctions and corners, all necessary fittings complete, including applying a priming coat of approved steel primer. Using M.S. angels 40x40x6 mm for diagonal braces including cost of materials, labour, usage charges of machinery complete as per specifications and as per directions of the Engineer-in-Charge	Sqm	1.62	4066.26	Rupees Four Thousand Sixty Six And Paise Twenty Six Only
E-8	Providing and fixing M.S. angle 50x50x5 mm to act as nosing with lugs of M.S. flat 10x5 mm, 10 cm long, forked at end 60cm apart (minimum three lugs to be provided), including necessary welding and applying a priming coat of approved primer on exposed surface etc. complete.	kg	3611.89	124.43	Rupees One Hundred Twenty Four And Paise Forty Three Only
E-9	Crawler mounted Crane 35 t capacity	Hr	150.00	4559.24	Rupees Four Thousand Five Hundred Fifty Nine And Paise Twenty Four Only

- 560092.

Sl No	Description of Work	Unit	Qty	Rate in Rs.	Rate in words
E-10	Providing and fixing stainless steel (Grade 304) railing made of Hollow tubes, channels, plates etc., including welding, grinding, buffing, polishing and making curvature (wherever required) and fitting the same with necessary stainless steel nuts and bolts complete, i/c fixing the railing with necessary accessories & stainless steel dash fasteners, stainless steel bolts etc., of required size, on the top of the floor or the side of waist slab with suitable arrangement as per approval of Engineer-in- charge, (for payment purpose only weight of stainless steel members shall be considered excluding fixingaccessories such as nuts, bolts, fasteners etc.) including cost of materials, labour, usagecharges of	Kg	633.79	555.50	Rupees Five Hundred Fifty Five And Paise Fifty Only
E-11	Providing and fixing of Ornamental Granite Pillar of overall height of 1250mm 200x200sqmm, Octagonal to a height of 820mm and carving design at bottom as shown in drawing .and 280mm respectively as per the approved Design and drawing including quarry cutting to the required size and transporting the same from quarry to work spot\ including loading and un loading with all lead and lift etc. complete as per design and drawing. The work shall be carried out as per design and drawing. Firmly fixed to the ground by means of properly designed foundation of size 300mm x	Nos	21.00	12500.00	Rupees Twelve Thousand Five Hundred Only
E-12	Providing and fixing Glass fiber Reinforcement (GFRC) made up of Alkali Resistant Glass fiber which has high durability in cement composition Na20-Ca0-Zr02-Si02(Zirconium 16% min) diameter 13 micro mtr. Fiber Length varying between 18 to 20mm long specifically produced for use in GFRC and complying with PCI-MNL-130. Fixing to existing steel frame work used for purely decorative applications such as window trims, decorative columns exterior friezes or limestone like wall panels and with finishing painting including cost of materials, labour usage charges of machinery and centering works complete as per specification and as per directions of the Engineer-in-charge	Sqm	92.80	24000.00	Rupees Twenty Four Thousand Only
E-13	Bell for Clock tower bronze sculpture with following specification a) Making of clay modeling as per the approved schematic sketch b) Making of POP negative mould as per the approved clay model c) Making of FRP (Fiber Reinforced Plastic) casting master pattern d) Making of Bronze Metal (88% of copper and 12% of tin) casting by ABC mould by silica sand process with all necessary melting process materials e) Making of hand carving/ Chiseling grinding, brazing, antic bronze oxidizing by acid process including cost of bronze ornamental finishing f) Imported PU Poly utherin lacqor coating g) The height of the bell about 4.5 feet height and dia of 3.5 feet supported on Bell yoke or headstock,with sound bow, Clapper, lip etc,. with a weight of about 140.00 kgs (apporx) including cost t of all necessary raw materials, labour, artizans and semi artizans works including erection, Excluding all applicable taxes etc., (Including Erection and transportation charges etc.,) complete as per the direction of engineer in charge.	Nos	1.00	350000.00	Rupees Three Lakh(s) Fifty Thousand Only

560032.

Sl No	Description of Work	Unit	Qty	Rate in Rs.	Rate in words
E-14	4' 6" Clock with back light, Roman digits, with front glass 1.Clock dial design .... : Roman number dials with central Art work as per your selected clock dials. The numbers will be black vinyl cut letters placed on Food Grade Acrylic Imported Sheet of 5mm Thickness. We will produce the clock dial exactly as per your selected design.2. Machine for the tower clocks..... ..... : We will provide GPS based Machine for the tower clock so that the clocks will work with satellite time signals and will display IST Indian Standard Time. 3. Hands for the clock dials..... .. .. : We will provide One No. Hour hand and One No. Minute hand to show time on the clocks. Both the hands will be made with Aluminium Sheet metal and will be dynamically balanced for smooth travelling on the clock dials. The hands will be finished with black powder coat finish . 4. Working power for the tower clocks..... : The tower clocks will be designed to work with 220 Volts AC Single Phase 50Hz. Electric Power. . Battery back up for the tower clocks..... : We will provide 24 hours battery back-up for the tower clocks. The battery will provide power to the clocks for 24 hours on continuous rating. As soon as the electric power resumes, the clocks will start working with AC electric power. Changing from AC power to Battery power and back to AC electric power will be totally automatic. 6. Time Auto re-set facility in the clocks .... : If	Nos	4.00	435000.00	Rupees Four Lakh(s) Thirty Five Thousand Only

Executive Engineer
Yelahanka Project Division